



OLCT 10N

Fixed Gas Detection



Presentation


The OLCT 10N is a digital gas detector designed for detection of the most common gases in commercial and light industrial applications. Intended for use in combination with the MX 16, MX 32, MX43 or MX 256, the OLCT 10N provides a fast and accurate response. Up to 32 detectors can be connected on the same digital line or distributed on 8 lines.

All transmitter information is received by the controller in less than 1 second.

Non-intrusive operator interface requires only a simple magnetic wand and allows one man calibration without opening the enclosure, and calibration information, such as span reserve, is stored in the station.

Certified IP65 and ATEX 3 GD for its explosive version, it is authorized for use in ATEX zones 2 and 22 and is waterproof and dustproof.

Configuration example

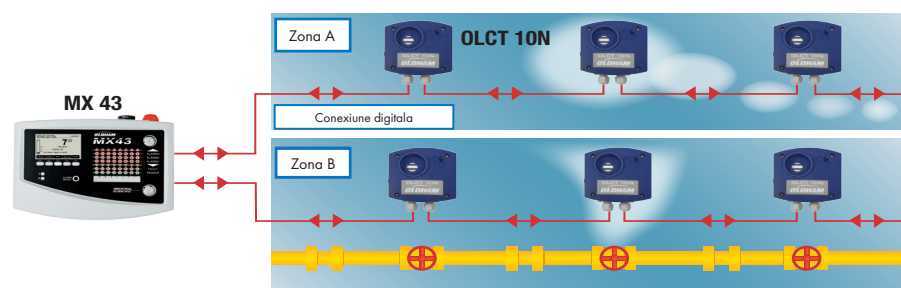

Features

- Detection of combustible gases, toxic gases or oxygen
- Digital technology
- Non-intrusive calibration
- Cost savings on wiring installation

OLCT 10N

Fixed Gas Detection

Technical Specifications

Détecteur numérique OLCT 10N

Range	CH ₄ , C ₂ H ₆ , C ₂ H ₁₀ , H ₂ O ₂ (> 2 years) O ₂ (5 years) CO H ₂ S NO NO ₂ NH ₃ CO ₂	0-100 % LEL (-20°C à + 55°C) 0-30 % vol (-20°C à + 50°C) 0-30 % vol (-40°C à + 50°C) 0-300 ppm / 0-1000 ppm (-20°C à + 50°C) 0-30 ppm / 0-100 ppm (-20°C à + 50°C) 0-100 ppm / 0-300 ppm (-20°C à + 50°C) 0-10 ppm / 0-30 ppm (-20°C à + 50°C) 0-100 ppm / 0-1000 ppm (-20°C à + 40°C) 0-5000ppm / 0-5% vol / 0-100% vol (-40 à + 50°C)
Output	RS485 Modbus, proprietary protocol	
Power supply	12-30 Vcc	
Consumption	Electrochemical sensor: Catalytic sensor : CO ₂ Infrared sensor:	2.5 mA in normal operation @ 24 Vdc 50 mA in normal operation @ 24 Vdc 20mA in normal operation @24Vdc
Calibration	Non-intrusive	
Cable inlet	2 PE M16, diamètre 4 à 8 mm	
Cable inlet	With MX 32 (24 Vdc version): Up to 8 toxic or oxygen gas detectors at 1000 m with a 0.9 mm ² (AWG 18) core size cable Up to 8 explosive gas detectors at 225 m with a 0.9 mm ² (AWG 18) core size cable With MX 43: 2 x M16 cable entries, outer diameter 4 to 8 mm Up to 32 detectors at 1000 m with a 0.9 mm ² (AWG 18) core size cable	
Dimensions (LxHxW)	118x110x60 mm	
Materials	ABS, UV and shocks resistant	
Ingress protection	IP65	
Approvals	for ATEX explosive versions II 3 GD Ex dc ec IIC T4 Gc for explosimetric versions Ex tc IIIC T135°C Dc -20°C<Ta<+55°C Electromagnetic compatibility according to EN50270	

Ordering information

Part Number	Description
OLCT10N-001	Digital transmitter OLCT 10N, range 0-100% LEL CH ₄
OLCT10N-003	Digital transmitter OLCT 10N, range 0-100% LEL H ₂
OLCT10N-004	Digital transmitter OLCT 10N, range 0-100% LEL C ₂ H ₁₀
OLCT10N-005	Digital transmitter OLCT 10N, range 0-100% LEL C ₃ H ₈
OLCT10N-200	Digital transmitter OLCT 10N, range 0-30% vol O ₂ (2 year O ₂ sensor)
OLCT10N-272	Digital transmitter OLCT 10N, range 0-30% vol O ₂ (5 year O ₂ sensor)
OLCT10N-204	Digital transmitter OLCT 10N, range 0-300 ppm CO
OLCT10N-205	Digital transmitter OLCT 10N, range 0-1000 ppm CO
OLCT10N-213	Digital transmitter OLCT 10N, range 0-30 ppm H ₂ S
OLCT10N-214	Digital transmitter OLCT 10N, range 0-100 ppm H ₂ S
OLCT10N-216	Digital transmitter OLCT 10N, range 0-100 ppm NO
OLCT10N-217	Digital transmitter OLCT 10N, range 0-300 ppm NO
OLCT10N-219	Digital transmitter OLCT 10N, range 0-10 ppm NO ₂
OLCT10N-220	Digital transmitter OLCT 10N, range 0-30 ppm NO ₂
OLCT10N-231	Digital transmitter OLCT 10N, range 0-100 ppm NH ₃
OLCT10N-232	Digital transmitter OLCT 10N, range 0-1000 ppm NH ₃
OLCT10N-252	Digital transmitter OLCT 10N, range 0-5000 ppm CO ₂
OLCT10N-239	Digital transmitter OLCT 10N, range 0-5% vol CO ₂
OLCT10N-241	Digital transmitter OLCT 10N, range 0-100% vol CO ₂

Accessories

Shock guard protector (6123717)
OLCT 10N calibration tool kit (6331163)

The OLCT 10N is the ideal solution for safe areas or zone 2 (22) ATEX locations.

Teledyne Oldham Simtronics quality assurance programmes demand the continuous assessment and improvement of all our products. Information in this leaflet could thus change without notification and does not constitute a product specification. Please contact Teledyne Oldham Simtronics or their representative if you require more details.



AMERICAS
14880 Skinner Rd
Cypress, TX 77429, USA
Tel.: +1 713-559-9200

EMEA
ZI Est, Rue Orfila, CS 20417
62027 ARRAS cedex France
Tel.: +33-3-21-60-80-80

ASIA PACIFIC
Room 04, 9th Floor, 275 Ruijing
Road, Xuhui District, Shanghai, China
TGFD_APAC@teledyne.com