



## DG-TX7

Intelligent Flammable Gas Detector



### Presentation

The MultiXplo DG-TX7 is an intelligent catalytic sensor based flammable gas detector used to detect a wide range of gases, including hydrogen (H<sub>2</sub>). The device has been designed for ease of installation, operation and maintenance in testing environments.

The MultiXplo DG-TX7 employs a pair of OXYCOL catalytic sensors in a compensated circuitry in order to provide reliable flammable gas detection in harsh environments, as long as oxygen is present.

The intelligent microprocessor driven unit is fully configurable using a wireless handheld terminal (TLU) or optionally via HART giving true flexibility to the installer. Parameters such as relay operation and alarm levels are all set via the TLU; a hazardous area approved hand-held unit. In addition, the sensor element is protected by the onboard electronics to prevent exposure to over-range LEL gas concentrations. This helps reduce on-going maintenance and service costs.

Users can select between 4-20 and 0-22mA depending on system requirements. The unit may be interfaced directly with a wide range of panels, controllers and PLC's etc.

Device status, including measured gas level is indicated on a colour coded 4 digit LED display.



TLU Wireless (IR)  
Hand-held Terminal

### Features

- High visible display
- On board relays
- Display color is status dependent



# DG-TX7

## Intelligent Flammable Gas Detector

### General

Technology	Low temperature oxidation process, Oxycol
Detects	Flammable Gases
Range	0 to 100% LEL
Calibration	with calibration gas

### Performance

Response time	T90 < 15 s (Methane)
Zero drift	+/- 3% Full scale deflection
Accuracy	+/- 5% Full scale deflection
Repeatability	+/- 1% Full scale deflection
Sensor life	Better than 5 years

### Output signal

Standard	4-20mA, max. load impedance 700M (Std. ) 2 x configurable Relays max 1 A / 30V
option HART (R)	HART Protocol (7th edition)
option	0-22mA (User configurable)
option	Lonworks (Syntel)
Local display	4 digit led display and backlight color status with automatic intensity adjustment

### Electrical

Power supply	24V DC, range (18 - 28V DC)
Power consumption	2W normal, 5W max (backlight at max)
Connection	0.3 mm2 (22 AWG) - 1.5 mm2 (16 AWG) Shielded cable recommended

### Environmental

Storage	-20°C TO +70°C (-4°F TO 158°F)
Operation	-20°C TO +60°C (-4°F TO 140°F)
Option	Sunshade, max. temp. 85°C (185°F)
Humidity	99% RH (non-condensing)
Pressure	Atmospheric pressure +/- 10%
Ingress	IP66
RFI /EMI	Complies with EN50270

### Housing

Material	316L stainless steel
Weight	4 Kg (8Lbs)

### Approvals


ATEX	II 2 G Ex d IIC T6 Gb (-20°C to +65°C) (-4°F to +149°F)
IECEX	Ex d IIC T6 Gb IECEX LCI 11.0060X

### Conformities

EN60079-29-1

### Accessories

TLU600	Infrared remote control unit
AS056-250	Sun shade
AS005	Calibration cup
AS047	Display protection
AS011 -2	Sample flow housing
AS019	Splash guard
CAL-K1 C-xxDF-1 A1 -00	Calibration kit 20ppm H2S

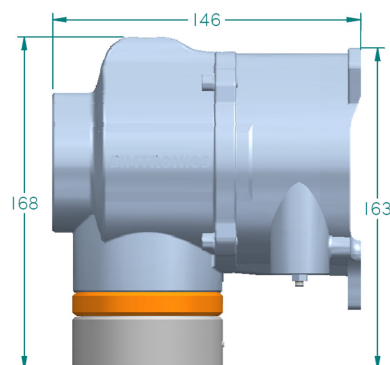

Teledyne Oldham Simtronics' quality assurance programs require continuous assessment and improvement of all our products. Therefore, the information in this leaflet may change without prior notification and should not be considered a product specification. If you require more details, please don't hesitate to contact Teledyne Oldham Simtronics or one of their representatives.