



TELEDYNE
GAS AND FLAME DETECTION
Everywhereyoulook™

Freedom 5000

Toxic & Oxygen Gas Detector



Freedom 5000

Toxic & Oxygen Gas Detector

Making installation and everyday operation easy

The Freedom Series 5000 are full-featured 4-20mA, loop powered transmitters designed to reliably detect oxygen and any of a number of toxic gases. Its universal electronics and flexible, user-friendly features drive down gas detection costs for almost any facility.

Advanced Gas Sensors and Universal Electronics

The Freedom series advanced GasPlus sensor technology combines with the Freedom's universal electronics to simplify use and minimize maintenance requirements of your gas detection system. Every Teledyne Gas & Flame Detection instruments "smart" sensor provides data such as gas type, range, and calibration data to the universal electronics for automatic transmitter configuration. A built-in lithium battery keeps the sensor "hot," which eliminates the need for sensor warm-up time. On board electronics enables users to easily zero and calibrate the sensor.. An E-connector eliminates pin alignments and makes sensor replacement quick and easy.



Freedom 5000 is housed in a light weight plastic enclosure

Easy Installation, Operation and Maintenance

The unique electrical design of the Freedom transmitter and sensor virtually eliminate false alarms due to RFI/EMI sources. The transmitter can be mounted directly to rigid conduit and is available with several optional adapters including wall/surface mount and a special "L" shaped bracket to allow mounting on top of flat surfaces such as gas cabinets. Freedom series transmitters are also available with quick connect 1/4 turn sample draw and (flat or round) duct mount adapters. The sensor can be ordered integral to the transmitter or remote on three feet of cable, perfect for mounting the sensor near ground level while keeping the display at eye level.

Operating Freedom transmitters is simple and intuitive. After start-up, the transmitter automatically configures to the sensor's parameters. The "missing sensor indicator" alerts operators that the sensor is either missing or the sensor transmitter connection has been broken.

Calibration is non-intrusive, performed by touching a magnet to the "Z" (zero), "S" (span), and up and down arrow markings on the enclosure. A programmable local inhibit feature and standard local display allows true one-person calibration.

Advanced features and smart sensor technology

Standard Features of the Freedom 5000

Freedom from stocking additional electronics. Universal transmitter electronics for all gas models.

Freedom from intrusive operation/calibration. A simple magnetic interface and local inhibit eliminates special tools or expensive IR remote controls.

Freedom from sensor pins or wires. E-connector makes for quick easy installation.

Freedom from field maintenance and calibration. Smart sensor technology permits sensor removal for remote calibration.

Freedom from zero drift and interfering gases. Rock Solid™ Sensor Technology offers superior stability and selectivity.

Freedom from sensor failure without warning. Built-in calibration factor notifies user of remaining sensor life.

Freedom from RFI/EMI induced alarms. Design concept eliminates interference through electronic design versus shielding.

Freedom from sensor warm-up times. An internal battery keeps the sensor “warm” for immediate start up.

Freedom from corrosion. All plastic construction with conformal coated internal circuitry.

- Redundancy of Safety Features – gives confidence in the life-saving equipment and allows workers to focus on the critical job at hand.
- Ease of Use – provides users a simple-to-use gas detector that requires minimal training, increases operational efficiencies and reduces training costs.
- Low Cost of Ownership – lowers costs after initial sale through its rugged design, assembly and warranty policy enabling you to direct valuable funding to training and other equipment cost.

Freedom 5000

Toxic & Oxygen Gas Detector

We Make Sensors that Make a Difference


Our team of research and development scientists work every day to advance sensor technologies and improve manufacturing techniques. The result – reliable, stable, and gas specific sensors including our Rock Solid™ series of high performance sensors.

High Performance Gas Sensors

Rock Solid™ high performance sensors use our proprietary technology that significantly enhances sensor performance. Rock Solid sensors can detect gas concentrations lower than other electrochemical gas sensor.

Rock Solid™ sensors provide:

- Highest stability
- Lowest zero drift
- Greatest sensitivity
- Greatest specificity to the target gas
- Fastest speed of response and recovery time

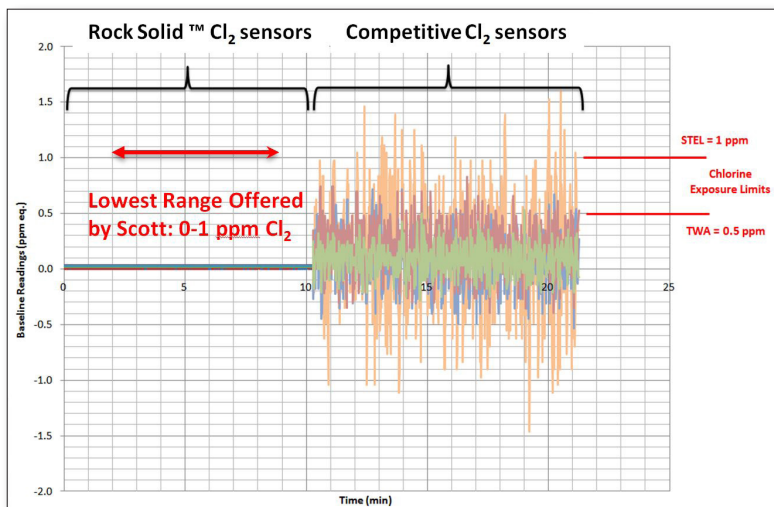

Rock Solid™ Sensor Performance



Rock solid™ Sensor technology

Our advanced electrochemical, high performance Rock Solid™ sensors for the Freedom 5000 are available to detect many toxic gases.

Chlorine
Chlorine Dioxide
Fluorine
Hydrogen Bromide
Hydrogen Chloride
Hydrogen Fluoride
Nitrogen Trifluoride
Ozone
Sulfur Dioxide



Remote Sensor

Freedom 5000 sensor connections available

- Integral Sensor with Transmitter
- Separated Sensor with 3 ft of cable available with remote sensor, flowcell or duct mount configurations

Freedom 5000 adapters available

- Rain Shield
- Flat Duct Adapter
- Round Duct Adapter (6 to 8 in diameter typical)
- Flow Cell

Freedom 5000 transmitter mounting adapter

- Wall/Surface Mount
- "L" Bracket used for mounting horizontal surfaces

Freedom 5000 Gas and sensor list

Ammonia (NH₃)
Arsine (AsH₃)
Carbon Monoxide (CO)
Chlorine (Cl₂) Rock Solid
Chlorine Dioxide (ClO₂) Rock Solid
Fluorine (F₂) Rock Solid
Ethylene Oxide (ETO)
Hydrogen Bromide (HBr) Rock Solid
Hydrogen Chloride (HCl) Rock Solid
Hydrogen Cyanide (HCN)
Hydrogen Fluoride (HF) Rock Solid
Hydrogen Sulfide (H₂S)
Nitrogen Dioxide (NO₂)
Nitrogen Trifluoride (NF₃) Rock Solid
Oxygen (O₂)
Ozone (O₃) Rock Solid
Silane (SiH₄)
Sulfur Dioxide (SO₂) Rock Solid
Sulfur Dioxide (SO₂)

Freedom 5000

Toxic & Oxygen Gas Detector

Specifications and ordering information

Freedom 5000 specifications	
Transmitter Enclosure	NEMA-4X Noryl plastic with stainless steel screws and hinge 2 each ½ in FNPT
Weight	1.0 lbs (0.45kg) without accessories
Approvals	CSA Ex ia IIC T4, AEx ia IIC T4 2002 1280868x Zone 0, Class 1, Division 1, Groups A, B, C and D (with conforming I.S. barrier) Class 1, Division 2, Groups A, B, C and D (without the need for an I.S. barrier)
Common specifications	CSA Class 1 Division 2 Groups A, B, C and D
Self-Diagnostics	Weak sensor indication; Electronic faults; Missing sensor; Sensor configuration (range and type)
Repeatability	+/- 2% FS
Linearity	+/- 2% FS
Output	4-20mA
Max Loop Road	2-Wire; 700 ohms at 24 VDC (22 mA based)
Power	10 to 28 VDC 2-wire loop power, 0.5 Watts at 24 VDC
Separated Sensor	Up to 3 ft (0.9M)
Display	3.5 digit LCD; 0 to 100% concentration bargraph; Inhibit Indication (IHB); Overrange Indication (OR); Low Cal Factor Indication – below 150 (SEN)
Local Inhibit	Programmable: 3.0 to 20mA
Temperature	Sensor: See Capabilities Chart Transmitter: -40° to 140°F (-40° to 60°C)* Note: at temperatures below 22°F display may not be visible
Humidity	Up to 99% RH, non-condensing (up to 100% R.H. with optional humi-shield) Not recommended for continuous extreme high/low humidity applications

Teledyne Gas & Flame Detection quality assurance programmes demand the continuous assessment and improvement of all our products. Information in this leaflet could thus change without notification and does not constitute a product specification. For more information, please contact us or your company representative



AMERICAS
35 Inverness Drive East
Englewood, CO 80112
USA
Tel: +1-626-934-1672

EMEA
ZI Est, Rue Orfila,
CS 20417
62027 ARRAS CEDEX, France
Tel.: +33-3-21-60-80-80

ASIA PACIFIC
Room 2722, No. 51 Jinzang Road,
Shanghai Free Trade Zone,
China
Tel: +86-134 8229 5057